



# PISCEAN CENTURY CHEMICALS PTE LTD

Head Quarters : Singapore  
No. 13 Tuas Link 1 Singapore 638589 Tel : (65) 6862 6028 (6 Lines) Fax : (65) 6862 6018  
Website : [www.pisceanchemicals.com](http://www.pisceanchemicals.com)  
E-mail : [piscean@pacific.net.sg](mailto:piscean@pacific.net.sg) / [admin@pisceanchemicals.com](mailto:admin@pisceanchemicals.com)

## PISCEAN BTS-75F

PISCEAN BTS-75F/11-2007

百  
胜  
世  
纪  
化  
工  
私  
人  
有  
限  
公  
司

PISCEAN **BTS-75F** 是一种高浓，高效常至中温水使用的中性无飞尘粉状纤维素酶。它主要应用于棉质纤维，牛仔服装后处理水洗工业。PISCEAN **BTS-75F** 的最佳使用条件为 pH 值 6.0 - 7.0, 温度为 40°C ± 5°C, 可使用条件为 pH 值 5.0 ~ 8.0, 温度为 30°C - 50°C。

PISCEAN **BTS-75F** 主用于牛仔布料和其他棉质纤维织物产生石磨洗、陈旧、柔软、桃皮及其他效果。牛仔衣物经 PISCEAN **BTS-75F** 处理后有明显的蓝底白花点。PISCEAN **BTS-75F** 对织物的破坏性非常低，对印第安染料回染及掉色程度非常少。

PISCEAN **BTS-75F** 能分解/分散于温水中，产品无危险，无易燃性。此产品符合环保 ECOTEX 100 需求，不含 NP, APEO, 磷酸及其它对人体环境有害成份。

### 产品特性:

外观 : 浅棕色无飞尘粉末  
pH 值 (25°C) 1g/L : 6.0 ± 1.0  
气味 : 轻微  
溶解度 : 分散/分解于水中

### 稀释方法:

Piscean BTS-75F : 3-5%  
百胜防染剂 B7 : 10%  
盐 : 其它

配好产品的使用量 : 依布重 0.5% ~ 1.5% 左右  
最佳使用温度 : 40°C ± 5°C  
最佳使用 pH 值 : 6.0 ± 0.5  
时间 : 30-60 分钟(应处理效果而定)

(使用浮石或不用均可，用量则根据所需达的处理效果酌量)



CERT. NO. : 2001-2-1286  
SS ISO 9001: 2000



CERT. NO : SG-1286



MEMBER OF  
SINGAPORE BUSINESS  
FEDERATION

### CHINA : PISCEAN CHEMICALS (SUZHOU) PTE LTD

No. 9, Xie Tang District, Suzhou Industrial Park, Suzhou, Jiang Su Province, China 215123.  
Tel / 电话 : (86) 512-6547 2722 / 6547 3799 / 6593 3037 Fax / 传真: (86) 512-6547 0988  
中国江苏省苏州市 215123, 苏州公业区斜塘分区 9 号



# PISCEAN CENTURY CHEMICALS PTE LTD

Head Quarters : Singapore  
No. 13 Tuas Link 1 Singapore 638589 Tel : (65) 6862 6028 (6 Lines) Fax : (65) 6862 6018  
Website : [www.pisceanchemicals.com](http://www.pisceanchemicals.com)  
E-mail : [iscean@pacific.net.sg](mailto:iscean@pacific.net.sg) / [admin@isceanchemicals.com](mailto:admin@isceanchemicals.com)

PISCEAN BTS-75F/11-2007


**包装:** 40 / 50 公斤桶装

**储存:** 需存在阴凉干燥的地方，避免阳光，不用时：紧盖以免污染


**备注:** 本产品不属于危险品，无易燃性，无危险性，无侵蚀性，用于织物柔软、陈旧、石磨后处理。

百  
胜  
世  
纪  
化  
工  
私  
人  
有  
限  
公  
司

**Fig.1 Relative Abrasion Units of PISCEAN BTS-75F against variable temperature range at pH 6.0**

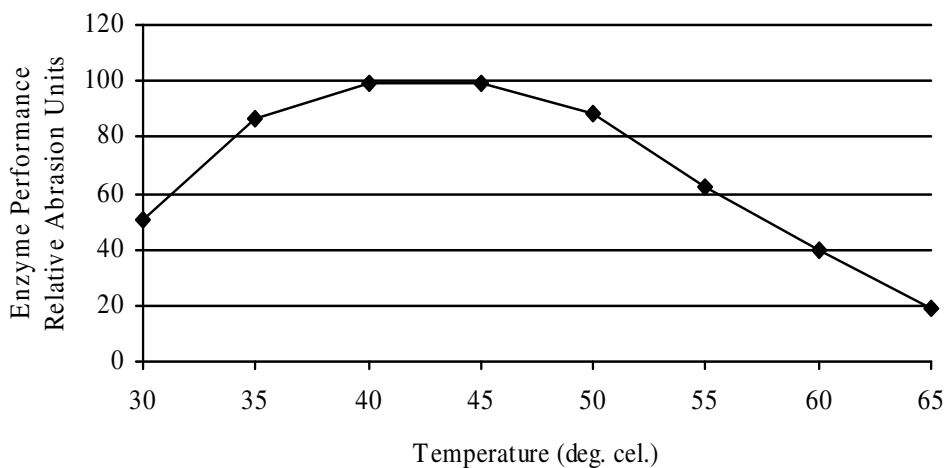

**Fig.2 Relative Abrasion Units of PISCEAN BTS-75F against variable pH at 40 deg. Cel.**

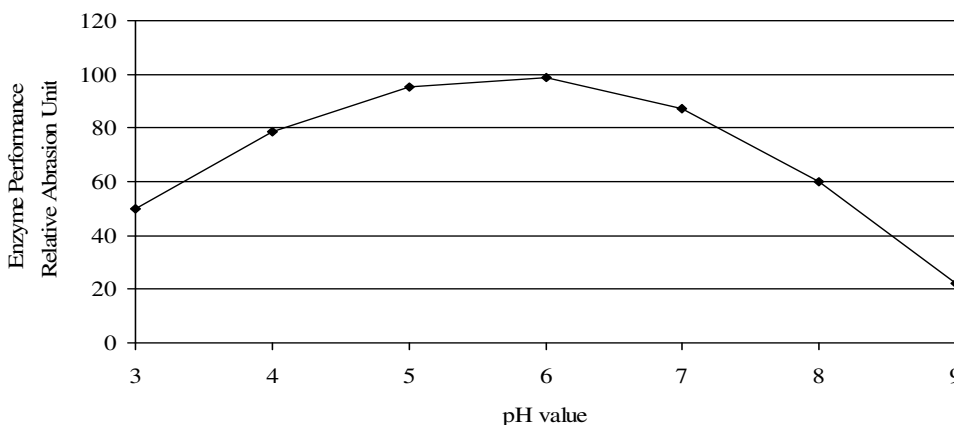

CERT. NO. : 2001-2-1286  
SS ISO 9001: 2000



CERT. NO : SG-1286



MGMT.SYS.  
RvA C 223



MEMBER OF  
SINGAPORE BUSINESS  
FEDERATION

## CHINA : PISCEAN CHEMICALS (SUZHOU) PTE LTD

No. 9, Xie Tang District, Suzhou Industrial Park, Suzhou, Jiang Su Province, China 215123.  
Tel / 电话 : (86) 512-6547 2722 / 6547 3799 / 6593 3037 Fax / 传真: (86) 512-6547 0988  
中国江苏省苏州市 215123, 苏州公业区斜塘分区 9 号

*Piscean Century Chemicals Pte Ltd does not take liability to the effectiveness of the products since users application conditions may be different.*